


屋面吊 Derrick Crane

DCB42-18

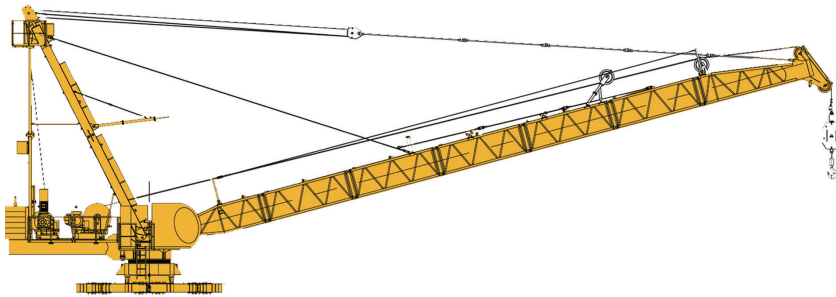


载荷特性 Load Diagram

30m		7,0	13,3	15	18	20	22	26	30	m
		9,00	9,00	9,00	9,00	9,00	7,60	6,10	t	
		6,3	13,5	15	18	20	22	26	m	
		9,00	9,00	9,00	9,00	9,00	7,80	t		
26m		6,3	13,5	15	18	20	22	26	m	
		9,00	9,00	9,00	9,00	9,00	7,80	t		
		5,6	13,5	15	18	20	22	m		
		9,00	9,00	9,00	9,00	9,00	t			
22m		5,6	13,5	15	18	20	22	m		
		9,00	9,00	9,00	9,00	9,00	t			

地脚反力 Corner Forces

L (mm)	R1 (kN)	R2 (kN)	自重 (t) Dead Weight	配重 (t) Counter Weight
5657	298	496	34,8	18
8485	193	390		

起重臂 Jib

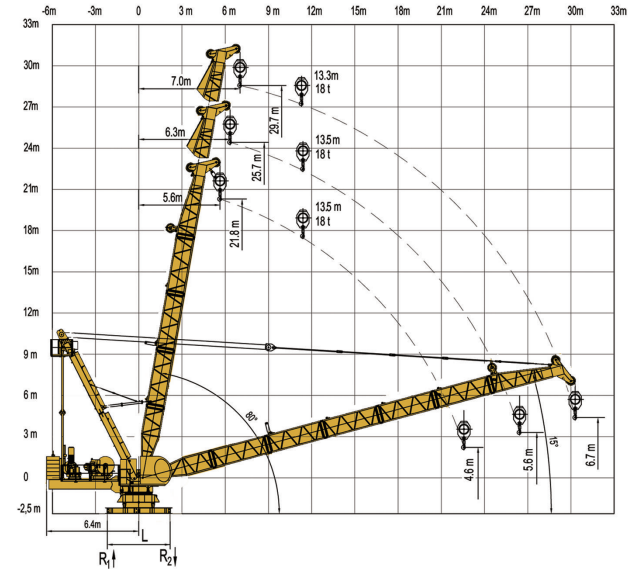

机构性能 Mechanisms

机构特性 Mechanisms specification									kW	
起升 Hoisting	55LVF45	m/min	50	37,5	25	25	18,75	12,5	800m	55
		t	3,8	6,4	9,0	8,2	13,1	18,0		
拉臂 Luffing	37FVF30	min	15°~80° t=2,0				254m	37		
回转 Slewing	RZV185	r/min	0,66					185Nm		
电源 Power Supply		380V 50Hz / 440V 60Hz								
KVA 供电容量 Necessary Electric Power		110 kVA								

* 数据可能有所调整，以产品说明书为准。

* Relative parameter might be adjusted. Final parameter is subject to its instruction manual.