



动臂式塔式起重机 Luffing Tower Crane

GHD4015-6

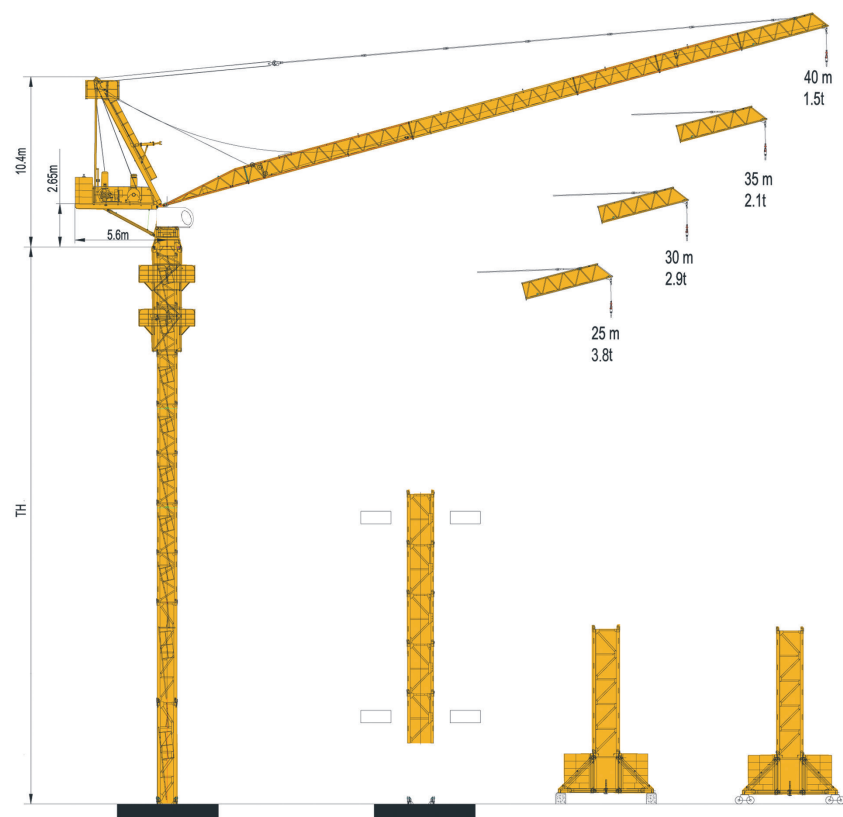


起重臂 Jib

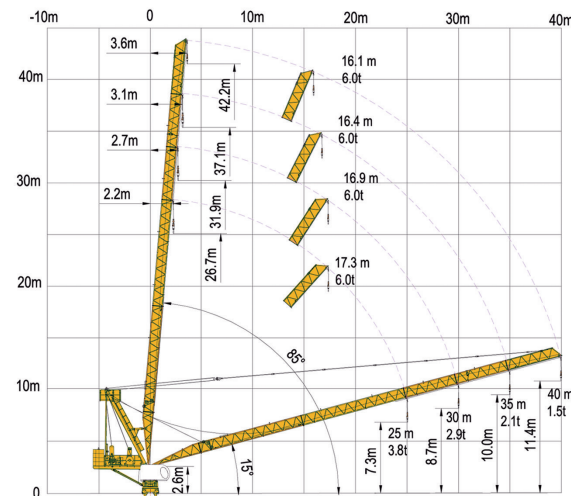

载荷特性 Load Diagrams

	3,6	15	16,11	20	25	30	35	40	m
40m	3,00	3,00	3,00	3,00	3,00	2,54	1,94	1,50	t
	6,00	6,00	4,63	3,21	2,39	1,79	1,35		t
35m	3,00	3,00	3,00	3,00	3,00	2,72	2,11		m
	6,00	6,00	4,71	3,43	2,57	1,96			t
30m	3,00	3,00	3,00	3,00	3,00	2,88			m
	6,00	6,00	4,82	3,58	2,73				t
25m	3,00	3,00	3,00	3,00					m
	6,00	6,00	5,05	3,76					t


塔身 Tower

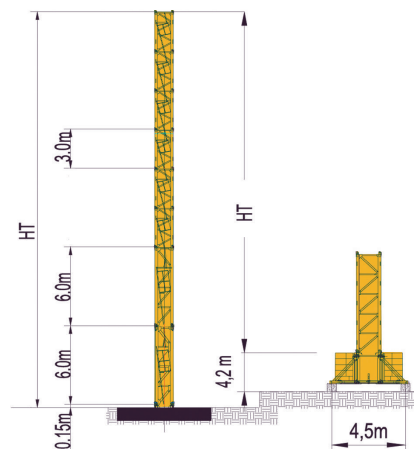

Tower configuration
塔身组成


序号 No.	塔身 Tower	基础节 Base Mast	标节 Mast	高度 (米) HT(m)	臂长 (米) Jib reach(m)
1	S24	2	6	30,15	25 - 40

附着 Anchorages

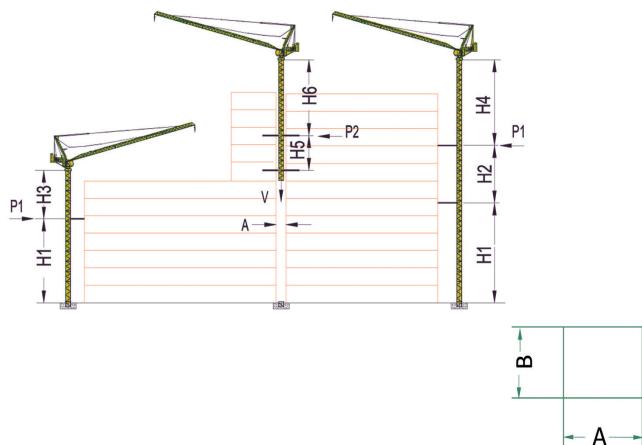

塔身 Mast	S24		
	m	工作状态 Working	非工作状态 Off Working
		t	t
H1	24,1	—	—
H2	12,0	—	—
H3	18,0	—	—
H4	18,0	—	—
H5	9,0	—	—
H6	17,0	—	—
P1	—	6,5	10,5
P2	—	7,2	11,7
V	—	31,5	30,0
A	1,5		
B	1,4		

基础 Foundation



Stationary Crane
固定式起重机

塔身 Tower	高度 (米) TH(m)	臂长 (米) Jib reach(m)	基础载荷 Foundation loadings			地脚反力 Corner forces	
			Mc (kN.m)	Nc (kN)	H (kN)	F1 (kN)	F2 (kN)
S24	30,15	40	2306	602	97,3	-868	1170

运输 Shipping

塔身 Tower	高度 (米) TH(m)	集装箱数量 Container QTY			
		FR	40' OP	40' HQ	20' GP
S24	30,15			4	

机构性能 Mechanisms

机构特性 Mechanisms specification											kW
起升 Hoisting		K107B-43,2-YZPE22	m/min	40,0	30,0	20,0	20,0	15,0	10,0	420m	22
			t	1,5	2,2	3,0	3,0	4,4	6,0		
拉臂 Luffing		K107B-55,5-YZPE15	min	15°~85° t=2,80							15
回转 Slewing		YTRVF132M1-4F1	r/min	0,70							5,5
 电源 Power Supply						380V 50Hz / 440V 60Hz					
 供电容量 Necessary Electric Power						50kVA					