



平头式塔式起重机 Topless Tower Crane

GHP6016-10

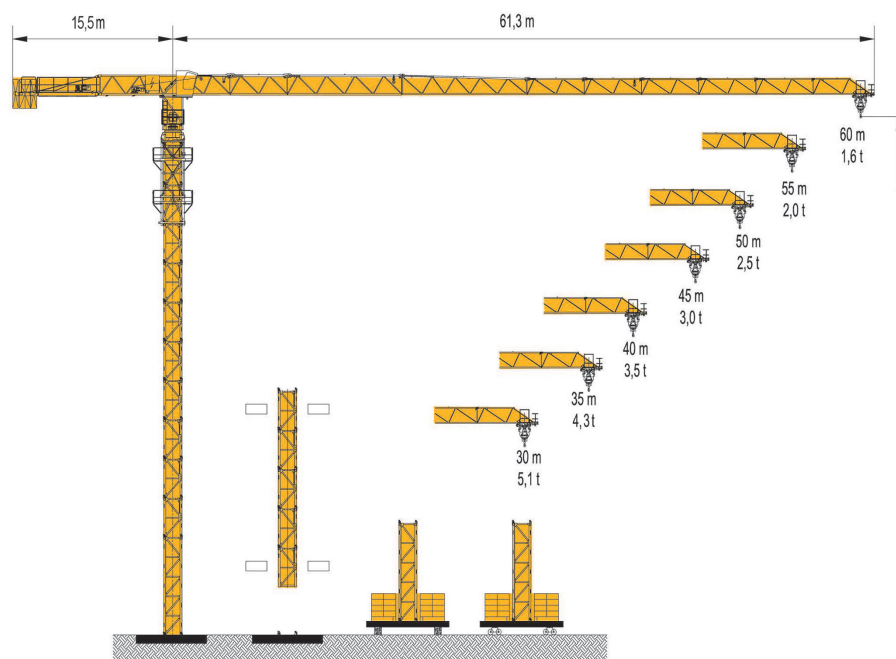


起重臂 Jib

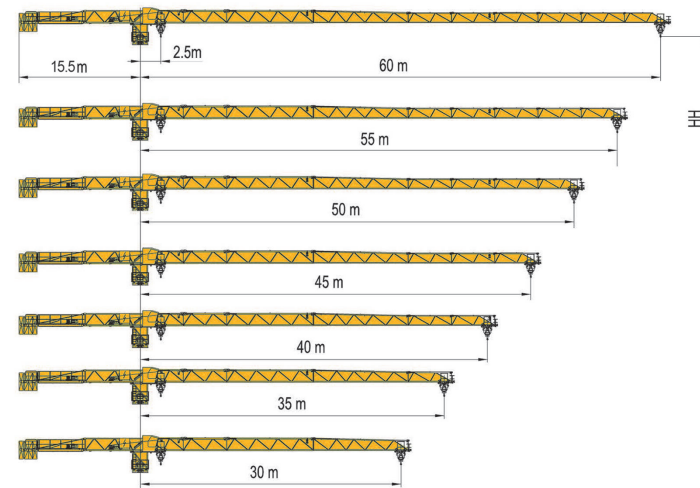

载荷特性 Load Diagrams

	2.5	12	15	18	20	23	25	30	35	40	45	50	55	60	m
60m	5.00	5.00	5.00	5.00	5.00	5.00	4.50	3.71	3.10	2.65	2.30	2.02	1.79	1.60	t
	10.00	7.78	6.32	5.60	4.76	4.32	3.47	2.87	2.43	2.08	1.81	1.59	1.40		t
55m	5.00	5.00	5.00	5.00	5.00	5.00	4.05	3.42	2.93	2.55	2.25	2.00			t
	10.00	8.75	7.18	6.37	5.44	4.94	4.00	3.34	2.84	2.46	2.15	1.90			t
50m	5.00	5.00	5.00	5.00	5.00	5.00	4.54	3.78	3.25	2.83	2.50				t
	10.00	9.50	7.89	7.01	5.99	5.45	4.42	3.70	3.15	2.73	2.40				t
45m	5.00	5.00	5.00	5.00	5.00	5.00	4.82	4.00	3.44	3.00					t
	10.00	10.00	8.20	7.39	6.32	5.75	4.67	3.91	3.34	2.90					t
40m	5.00	5.00	5.00	5.00	5.00	5.00	5.00	4.90	4.20	3.50					t
	10.00	10.00	8.40	7.51	6.43	5.85	4.75	3.98	3.40						t
35m	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	4.30						t
	10.00	10.00	8.80	7.91	6.77	6.16	5.01	4.20							t
30m	5.00	5.00	5.00	5.00	5.00	5.00	5.00								t
	10.00	10.00	9.07	8.06	6.88	6.27	5.10								t


塔身 Tower

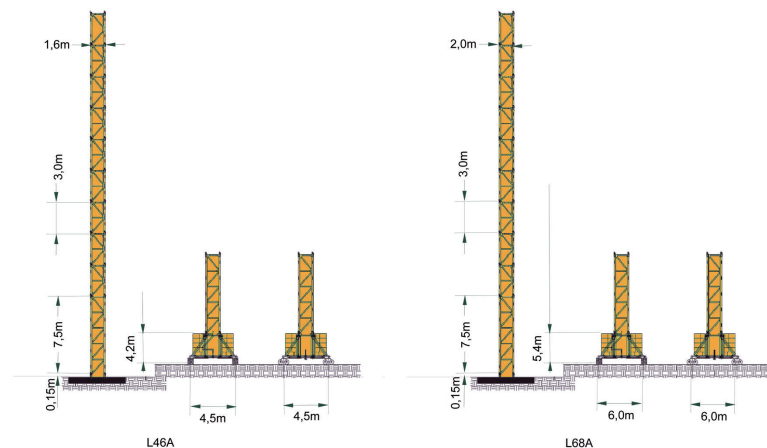

Tower configuration
塔身组成


序号 No.	塔身 Tower	基础节 Base Mast	标节 Mast	高度 (米) HT(m)	臂长 (米) Jib reach(m)
1	L46A	1	12	45,5	30 - 60
2	L68A	1	17	60,5	30 - 60

附着 Anchorages

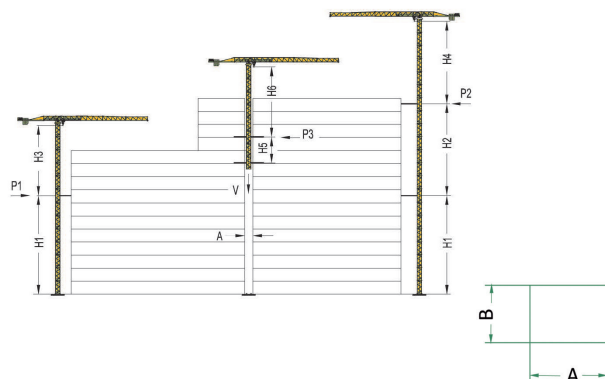

塔身 Mast	L46A				L68A			
	m	工作状态 Working	非工作状态 Off Working	m	工作状态 Working	非工作状态 Off Working	m	工作状态 Working
H1	33,0	—	—	48,0	—	—		
H2	24,0	—	—	36,0	—	—		
H3	33,5	—	—	48,5	—	—		
H4	33,5	—	—	48,5	—	—		
H5	15,0	—	—	18,0	—	—		
H6	24,5	—	—	33,5	—	—		
P1	—	8,9	21,2	—	9,0	27,6		
P2	—	10,6	21,0	—	12,9	28,5		
V	—	63,8	53,8	—	73,8	63,8		
A	2,2			2,6				
B	1,80			2,2				

基础 Foundation



Stationary Crane
固定式起重机

塔身 Tower	高度 (米) TH(m)	臂长 (米) Jib reach(m)	基础载荷 Foundation loadings			地脚反力 Corner forces	
			Mc (kN.m)	Nc (kN)	H (kN)	F1 (kN)	F2 (kN)
L46A	45,5	60	3202	595	97,3	-1266	1564
L68A	60,5	60	5250	738	144	-1672	2040

运输 Shipping

塔身 Tower	高度 (米) TH(m)	集装箱数量 Container QTY			
		FR	40' OP	40' HQ	20' GP
L46A	45,5			5	1
L68A	60,5			6	1

机构性能 Mechanisms

机构特性 Mechanisms specification												kW	
起升 Hoisting		37LVF25	m/min	72,2	54,1	36,1	36,1	27,0	18,0	450m	37		
			t	2,1	3,1	5,0	4,6	6,4	10,0				
		55RCS25	m/min	85,0		42,0		42,0		21,0		500m	40,5
			t	2,0		5,0		5,0		10,0			
变幅 Trolleying		4T3V4	m/min	0-58							95Nm		
回转 Slewing		RZV75 × 2	r/min	0,64							75Nm ×		
行走 Travelling		4RTVF4	m/min	22							4 × 4		
 电源 Power Supply						380V 50Hz / 440V 60Hz							
 供电容量 Necessary Electric Power						50,6kVA / 54,7kVA							