



平头式塔式起重机 Topless Tower Crane

GHP7524-12

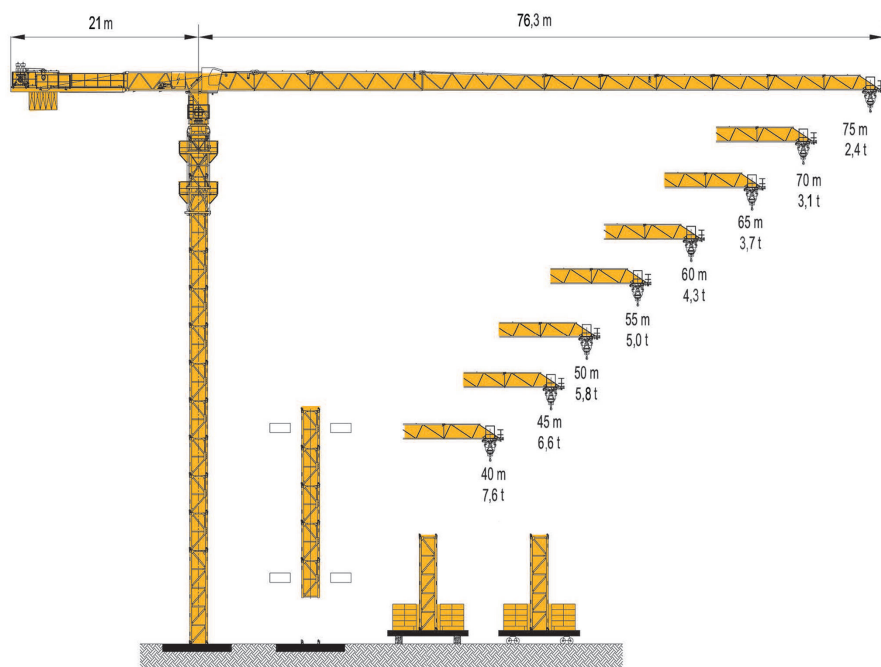


起重臂 Jib

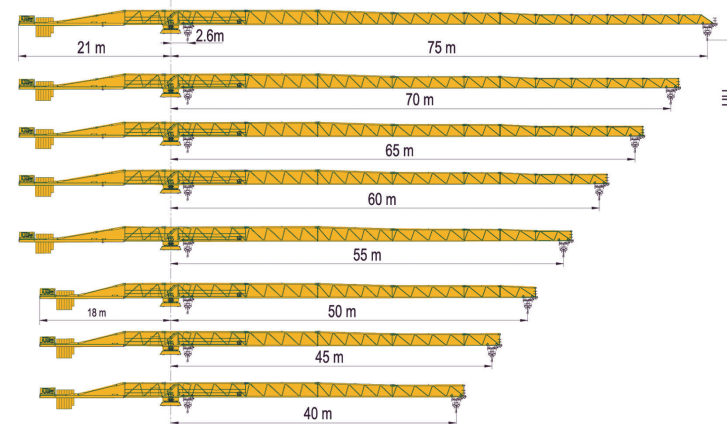

载荷特性 Load Diagrams

75m	2.6	15	18.9	20	25	30	35	40	45	50	55	60	65	70	75	m
		6.00	6.00	6.00	6.00	6.00	6.00	5.27	4.58	4.03	3.58	3.21	2.90	2.63	2.40	t
		12.00	12.00	11.44	8.82	7.68	7.10	4.99	4.30	3.75	3.29	2.92	2.60	2.33	2.10	t
70m	2.6	15	20	21.3	25	30	35	40	45	50	55	60	65	70	m	
		6.00	6.00	6.00	6.00	6.00	6.00	5.28	4.67	4.17	3.75	3.40	3.10	t		
		12.00	12.00	12.00	9.97	8.08	6.74	5.74	4.97	4.36	3.86	3.45	3.10	2.80	t	
65m	2.6	15	20	23.3	25	30	35	40	45	50	55	60	65	m		
		6.00	6.00	6.00	6.00	6.00	6.00	5.70	5.05	4.51	4.07	3.70	t			
		12.00	12.00	12.00	10.88	8.84	7.40	6.34	5.51	4.85	4.32	3.88	3.50	t		
60m	2.6	15	20	24.2	25	30	35	40	45	50	55	60	m			
		6.00	6.00	6.00	6.00	6.00	6.00	6.00	5.32	4.76	4.30	t				
		12.00	12.00	12.00	11.43	9.30	7.79	6.68	5.81	5.13	4.57	4.10	t			
55m	2.6	15	20	25	30	35	40	45	50	55	m					
		6.00	6.00	6.00	6.00	6.00	6.00	6.00	5.58	5.00	t					
		12.00	12.00	12.00	9.74	8.17	7.00	6.10	5.38	4.80	t					
50m	2.6	15	20	25	25.8	30	35	40	45	50	m					
		6.00	6.00	6.00	6.00	6.00	6.00	6.00	6.00	5.80	t					
		12.00	12.00	12.00	12.00	10.10	8.48	7.27	6.34	5.60	t					
45m	2.6	15	20	25	26.5	30	35	40	45	m						
		6.00	6.00	6.00	6.00	6.00	6.00	6.00	t							
		12.00	12.00	12.00	12.00	10.49	8.81	7.56	6.60	t						
40m	2.6	15	20	25	26.8	30	35	40	m							
		6.00	6.00	6.00	6.00	6.00	6.00	t								
		12.00	12.00	12.00	12.00	10.54	8.85	7.60	t							


塔身 Tower

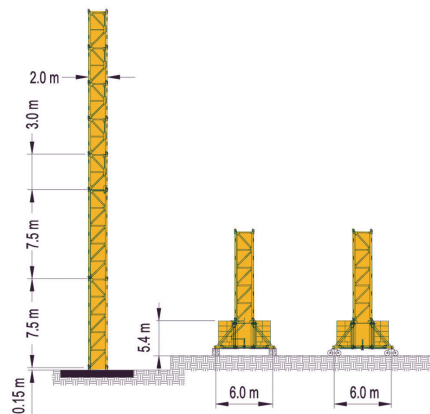

Tower configuration
塔身组成


序号 No.	塔身 Tower	基础节1 Base Mast 1	基础节2 Base Mast 2	过渡节 Adapter	标节 Mast	高度 (米) HH(m)	臂长 (米) Jib reach(m)
1	L68B2	1	1	1	12	51,5	40-75

附着 Anchorages

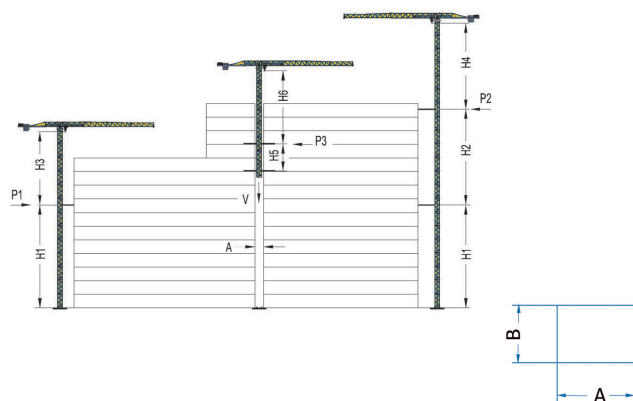

塔身 Tower	m	L68B2带过渡节 L68B2 with adapter	
		工作状态 Working	非工作状态 Off Working
		t	t
H1	40,5	—	—
H2	24,0	—	—
H3	35,0	—	—
H4	35,0	—	—
H5	14,0	—	—
H6	21,0	—	—
P1	—	14,8	21,3
P2	—	16,2	26,4
V	—	89,1	77,1
A	2,6		
B	2,2		

基础 Foundation



Stationary Crane
固定式起重机

塔身 Tower	高度 (米) TH(m)	臂长 (米) Jib reach(m)	基础载荷 Foundation loadings			地脚反力 Corner forces	
			Mc(kN.m)	Nc(kN)	H(kN)	F1(kN)	F2(kN)
L68B2	51,5	75	5505	833	164,3	-1738	2154

运输 Shipping

塔身 Tower	高度 (米) TH(m)	集装箱数量 Container QTY			
		FR	40' OP	40' HQ	20' GP
L68B2	51,5			8	

机构性能 Mechanisms

机构特性 Mechanisms specification											kW
起升 Hoisting		55JLF30	m/min	86,0	64,5	43,0	43,0	32,2	21,5	550m	55
			t	2,8	3,8	6,0	5,6	7,6	12,0		
			m/min	70,4	52,8	35,3	35,2	26,4	17,6	500m	45
			t	2,5	3,8	6,0	5,0	7,6	12,0		
变幅 Trolleying		4TVF	m/min	63							185Nm
				65							5,5
回转 Slewing		7,5SVF	r/min	0,67							95Nm x
行走 Travelling		5,5RVF	m/min	25							5 x 4
 电源 Power Supply							380V 50Hz / 440V 60Hz				
 供电容量 Necessary Electric Power							80kVA / 67kVA				