



平头式塔式起重机 Topless Tower Crane

GHP7524-16

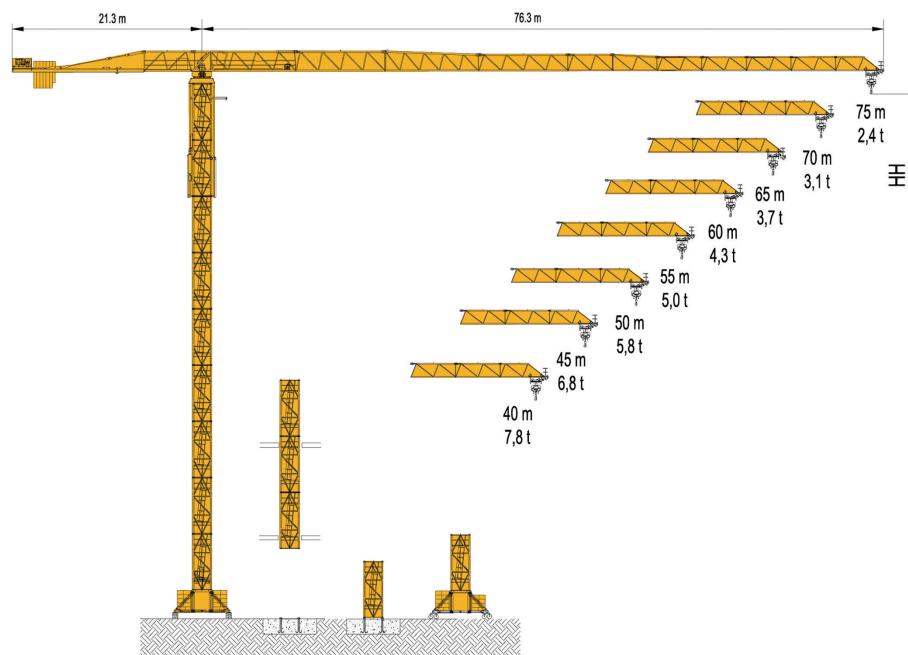


起重臂 Jib

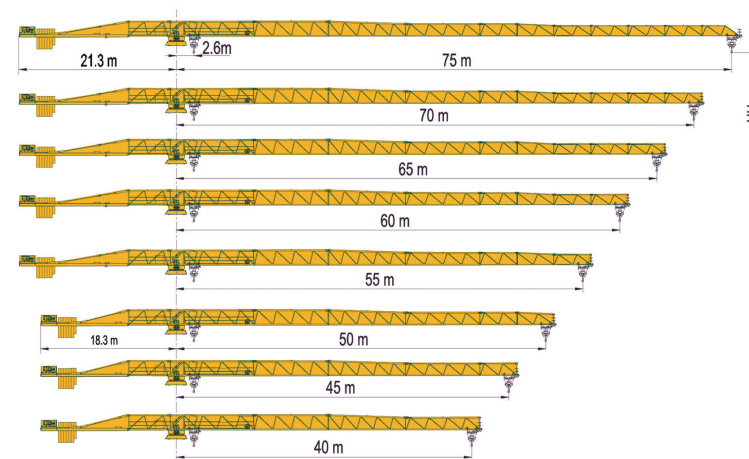

载荷特性 Load Diagrams

	2.6	14.9	15	20	25	30	35	40	45	50	55	60	65	70	75	m
75m	8.00	8.00	8.00	8.00	7.36	6.16	5.27	4.58	4.03	3.58	3.21	2.90	2.63	2.40	2.10	t
	16.00	15.92	11.44	8.82	7.10	5.89	4.99	4.30	3.75	3.29	2.92	2.60	2.33	2.10	1.80	t
70m	8.00	8.00	8.00	8.00	8.00	7.06	6.06	5.28	4.67	4.17	3.75	3.40	3.10	2.80	2.50	t
	16.00	16.00	12.87	9.97	8.08	6.74	5.74	4.97	4.36	3.86	3.45	3.10	2.80	2.50	2.20	t
65m	8.00	8.00	8.00	8.00	8.00	7.58	6.52	5.70	5.05	4.51	4.07	3.70	3.40	3.10	2.80	t
	16.00	16.00	13.98	10.88	8.84	7.40	6.34	5.51	4.85	4.32	3.88	3.50	3.20	2.90	2.60	t
60m	8.00	8.00	8.00	8.00	8.00	7.97	6.86	6.00	5.32	4.76	4.30	3.90	3.60	3.30	3.00	t
	16.00	16.00	14.68	11.43	9.30	7.79	6.68	5.81	5.13	4.57	4.10	3.70	3.40	3.10	2.80	t
55m	8.00	8.00	8.00	8.00	8.00	8.00	7.19	6.29	5.58	5.00	4.50	4.10	3.80	3.50	3.20	t
	16.00	16.00	15.35	11.96	9.74	8.17	7.00	6.10	5.38	4.80	4.30	3.90	3.60	3.30	3.00	t
50m	8.00	8.00	8.00	8.00	8.00	8.00	7.47	6.54	5.80	5.20	4.70	4.30	4.00	3.70	3.40	t
	16.00	16.00	15.90	12.40	10.10	8.48	7.27	6.34	5.60	5.00	4.50	4.10	3.80	3.50	3.20	t
45m	8.00	8.00	8.00	8.00	8.00	8.00	7.76	6.80	6.00	5.40	4.90	4.50	4.20	3.90	3.60	t
	16.00	16.00	16.00	12.87	10.49	8.81	7.56	6.60	5.80	5.20	4.70	4.30	4.00	3.70	3.40	t
40m	8.00	8.00	8.00	8.00	8.00	8.00	7.80	7.00	6.20	5.60	5.10	4.70	4.40	4.10	3.80	t
	16.00	16.00	16.00	12.93	10.54	8.85	7.60	6.70	5.90	5.30	4.80	4.40	4.10	3.80	3.50	t

塔身 Tower

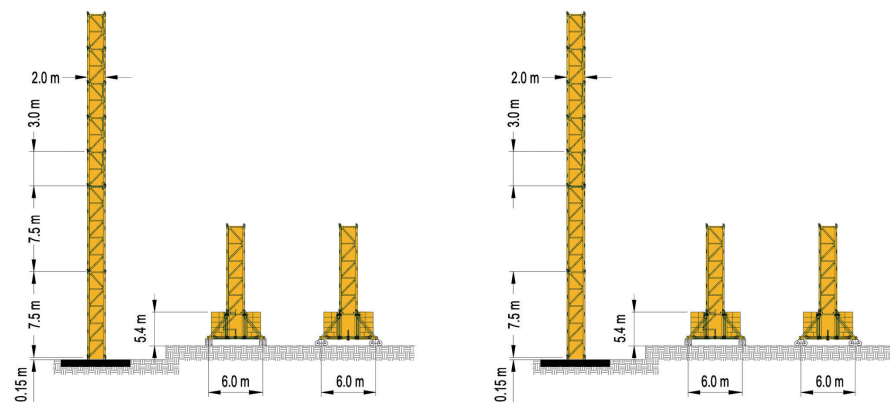


L68B1

Tower configuration
塔身组成

L69B


序号 No.	塔身 Tower	基础节1 Base Mast 1	基础节2 Base Mast 2	过渡节 Adapter	塔节 Mast	高度 (米) TH (m)	臂长 (米) Jib reach (m)
1	L68B1	1	1	1	12	51,5	40-75
2	L69B	1		1	14	51,65	40-75

附着 Anchorages

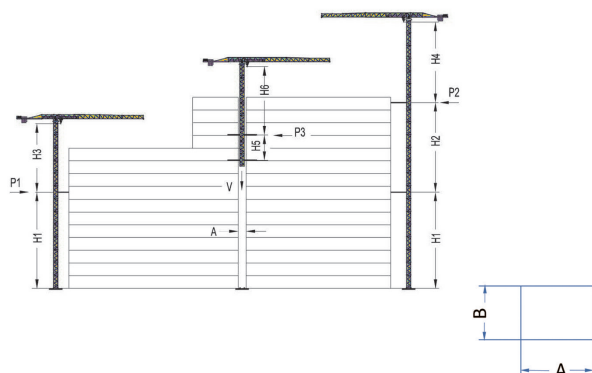

塔身 Tower	m	L68B1		L69B	
		工作状态 Working	非工作状态 Off Working	工作状态 Working	非工作状态 Off Working
	t	t	t	t	t
H1	40,5	—	—	37,5	
H2	27,0	—	—	27,0	
H3	35,0	—	—	37,5	
H4	35,0	—	—	37,5	
H5	14,0	—	—	12,0	
H6	21,0	—	—	36,0	
P1	—	14,2	21,8	24,2	27,3
P2	—	18,5	23,4	23,2	26,3
V	—	94,0	78,0	105,0	94,5
A	2,6			2,6	
B	2,2			2,2	

基础 Foundation



Stationary Crane
固定式起重机

塔身 Tower	高度 (米) TH (m)	臂长 (米) Jib reach (m)	基础载荷 Foundation loadings			地脚反力 Corner forces	
			Mc(kN.m)	Nc(kN)	H(kN)	F1(kN)	F2(kN)
L68B1	51,5	75	5680	842	164,3	-1798	2218
L69B	51,65	75					

运输 Shipping

塔身 Tower	高度 (米) TH (m)	集装箱数量 Container QTY			
		FR	40' OP	40' HQ	20' GP
L68B1	51,5			10	
L69B	51,65				

机构性能 Mechanisms

机构特性 Mechanisms specification										kW	
起升 Hoisting		75LVF40	m/min	82,0	69,0	46,0	41,0	34,5	23,0	500m	75
			t	3,5	5,0	8,0	7,0	10,0	16,0		
变幅 Trolleying		6T3V7	m/min	65							185Nm
		8DVF7		74							7,5
回转 Slewing		RZV95×3	r/min	0,67							95Nm×3
行走 Travelling		5RTVF4	m/min	25							5,5×4
 电源 Power Supply							380V 50Hz / 440V 60Hz				
 供电容量 Necessary Electric Power							103 kVA				