



塔头式塔式起重机 Topkit Tower Crane


GHT6024-10

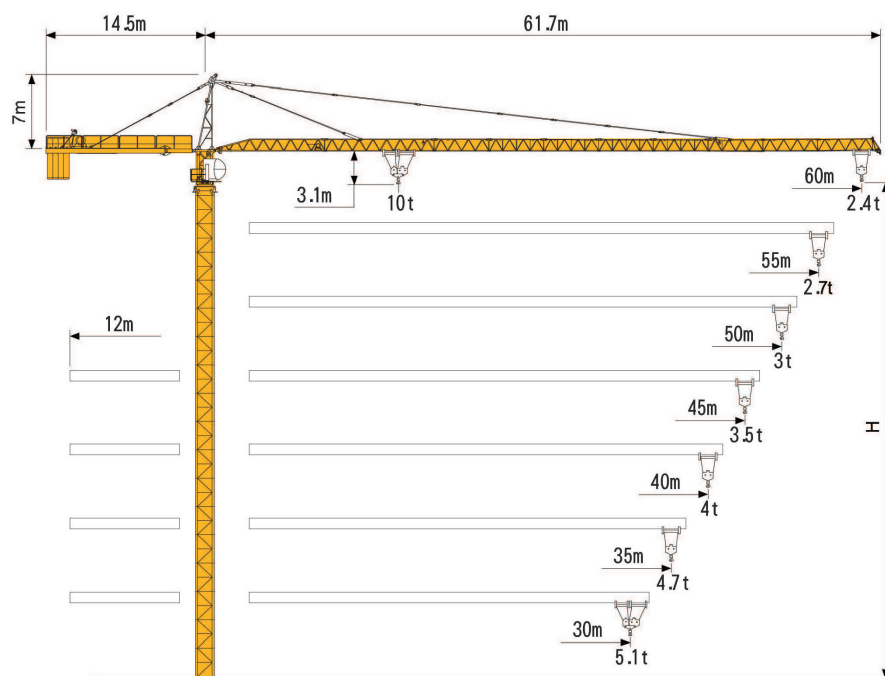


载荷特性 Load Diagrams

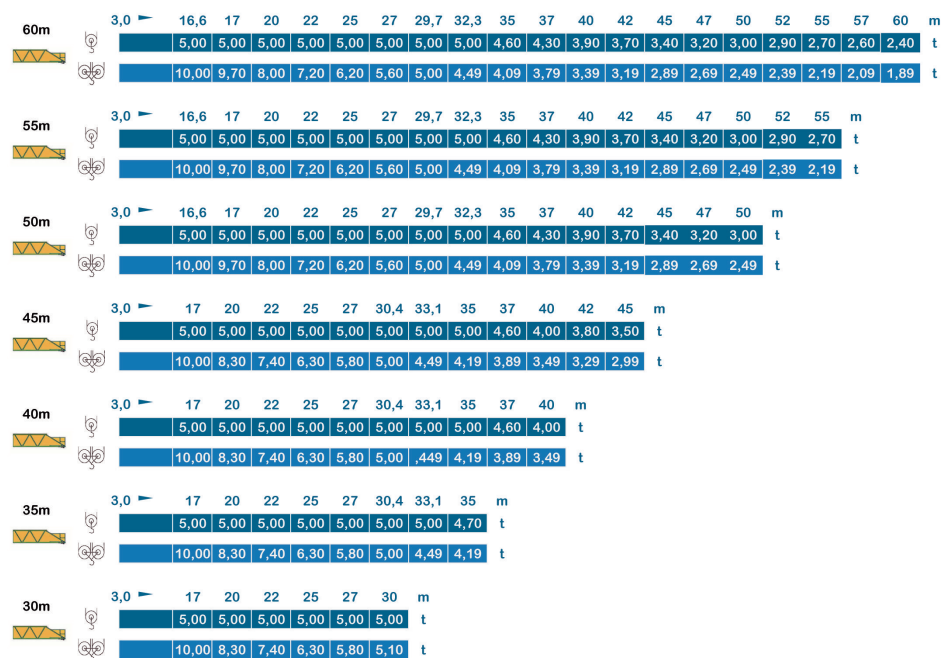

塔身 Tower

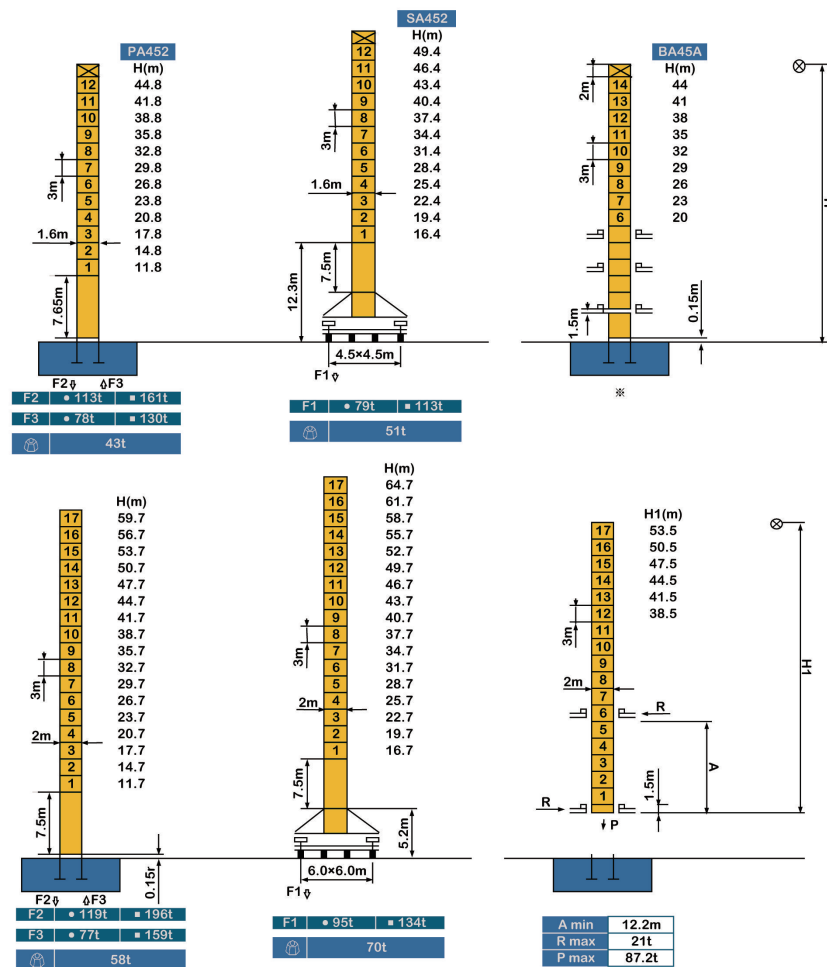

附着 Anchorages

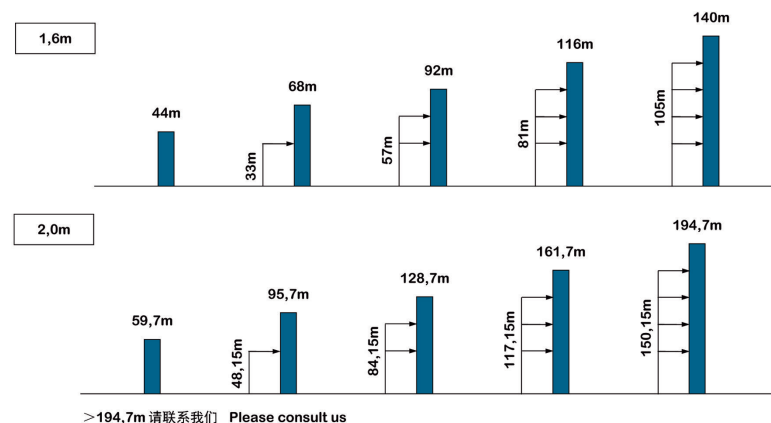

机构性能 Mechanisms

机构特性 Mechanisms specification								kW	
起升 Hoisting		55RCS25	m/min	0-42	0-85	0-21	0-42	500m > 500m ※	40,5
			t	5,0	2,5	10,0	5,0		
		45JLF25	m/min	0-45	45-90	0-22	22-45	550m > 550m ※	45
			t	5,0	2,5	10,0	5,0		
变幅 Trolleying		95JXL	m/min	0 - 58					95Nm
回转 Slewing		RCV95 (JH08)	r/min	0 - 0,64					2 × 95Nm
行走 Travelling		RT443(L68B2)	m/min	12,1 / 24,1					4 × 3,4/1,7
		RT324(L46A1)	m/min	12,7 / 25,4					2 × 2,6/5,2
 电源 Power Supply					380V (±5%) 50Hz				
 供电容量 Necessary Electric Power					55RCS25: 80kVA				

※ 请联系我们 Please consult us
△ 可选 Option

F 反力 Reactions

- 工作状态 In service
- 非工作状态 Out of service

自重 Self-load

不带载荷及配重, 最大臂长及标准高度时的自重。 Without load and counter-weight with longest jib and standard height