


吊篮 Suspended Platform



悬挂机构 Suspending Mechanism

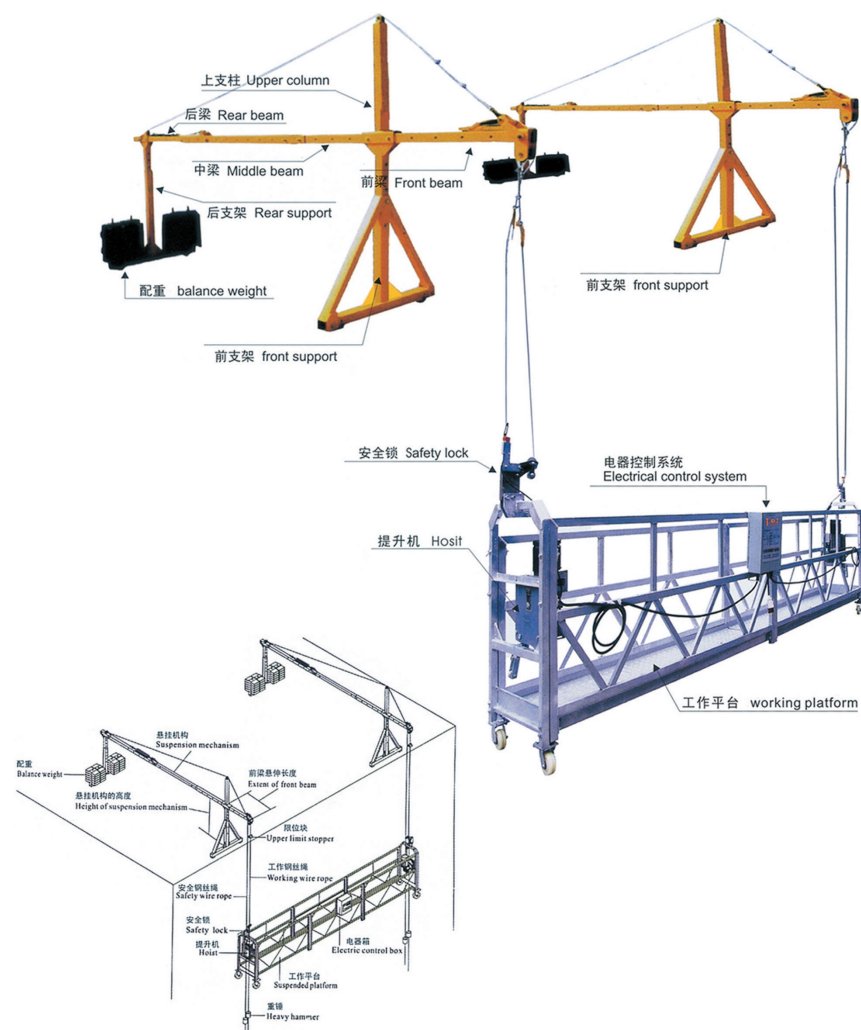


The height of the platform can be adjusted within 1150-1800mm with arm which can be stretched out and drawn back. It can be widely used on parapet and complicated building in different height. Customized platform can be also supplied to meet different requirements.

调节范围1150-1800mm，高度调节，自由伸缩的挂臂，可适用于不通高度的女儿墙和复杂面，并可根据各种特殊的工作条件，另行设计制造。

In addition to general used suspending mechanism, we can also make special suspending-platform in accordance with different building wall. (As shown below)

除提供通用悬挂机构外，可根据各种房屋结构设计适用于特殊屋面的悬挂结构（如下图）

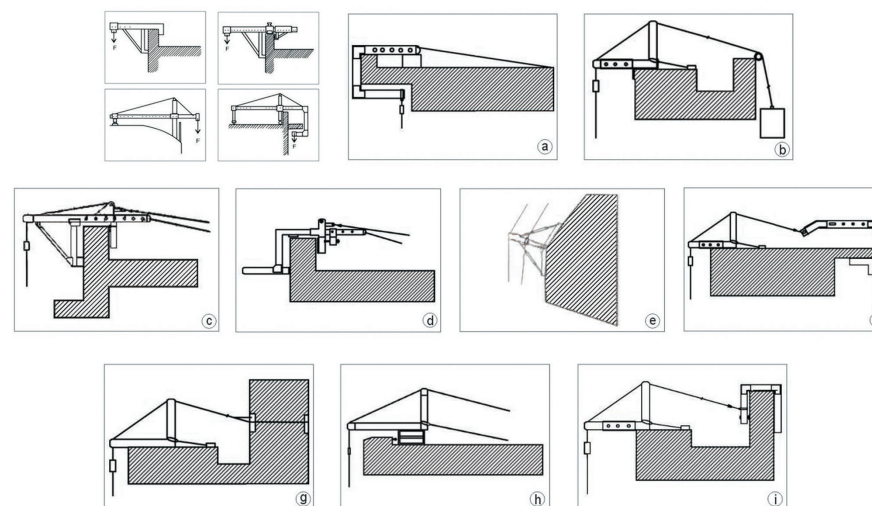

工作平台 Working Platform



Aluminum alloy 铝合金

Steel 钢

Steel with dipping zinc 镀锌

Technical Data 技术参数表


Model 型号	ZLP150	ZLP400	ZLP500	ZLP630	ZLP800	ZLP1000
Material 材质	Steel / Aluminum Alloy / Steel With Dipping Zinc					
Height 高度	100 m					
Rated Load 额定载重	150 Kg	400 Kg	500 Kg	630 Kg	800 Kg	1000 Kg
Length of Platform 平台长度	1.2 m	4 m	5 m	6 m	7.5 m	7.5 m
Safety Lock Type 安全锁型号	LST20					
Hoist Model 提升机型号	LTD6.3	LTD6.3	LTD6.3	LTD6.3	LTD8.0	LTD10.0
Volume 体积	1.6 m³	2.3 m³	2.9 m³	3 m³	3.2 m³	3.3 m³
Weight 重量	800 Kg	1700 Kg	1650 Kg	1850 Kg	2000 Kg	2300 Kg
20' Container 20尺柜	12 pcs	12 pcs	11 pcs	10 pcs	9 pcs	8 pcs
Counter Weight 配重	25Kg × 16pcs	25Kg × 28pcs	25Kg × 30pcs	25Kg × 36pcs	25Kg × 40pcs	25Kg × 50pcs
Diameter of Steel Rope 钢丝绳直径	8.3 mm	8.3 mm	8.3 mm	8.3 mm	8.6 mm	8.6 mm
Voltage 电压	220 / 380 / 415 / 440 V					



特殊平台 Specialized Platform



Circle suspended platform
(The size of the circle can adjust)
圆弧吊篮 (无论圆弧大小可任意调节)



ZLP800 double rack aluminum alloy
suspended platform
ZLP800 型双层铝合金吊篮



The platform used for the
American market
适用于北美地区



ZLP250 new generation aluminum alloy
suspended platform
ZLP250 铝合金新型吊篮



90° assembly suspended platform
90° 角组合型吊篮



U suspended platform
U型吊篮

