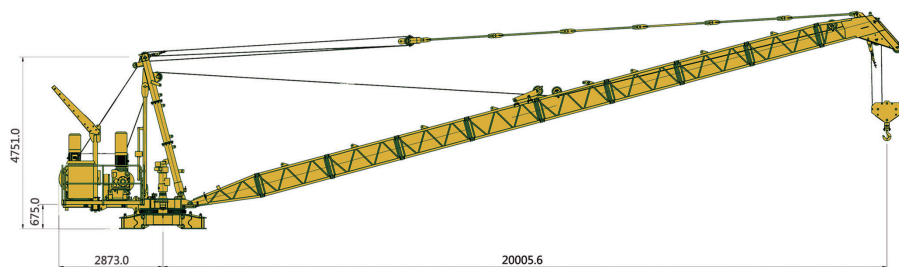


屋面吊 Derrick Crane

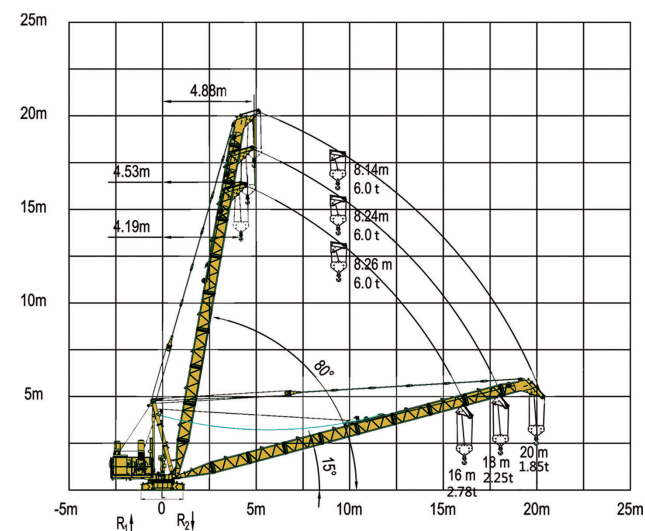
DCB20-6



载荷特性 Load Diagram

		4,19	8,14	9	10	11	12	13	14	15	16	17	18	19	20	m	
20m				4,00	4,00	4,00	4,00	4,00	3,60	3,24	2,94	2,66	2,42	2,18	2,02	1,85	t
				6,00	5,72	5,01	4,43	3,93	3,52	3,16	2,85	2,58	2,34	2,10	1,94	1,76	t
		4,53	8,24	9	10	11	12	13	14	15	16	17	18	m			
18m				4,00	4,00	4,00	4,00	4,00	3,66	3,30	2,99	2,73	2,48	2,25	t		
				6,00	5,79	5,07	4,49	4,00	3,58	3,22	2,91	2,64	2,40	2,17	t		
		4,88	8,26	9	10	11	12	13	14	15	16	m					
16m				4,00	4,00	4,00	4,00	4,00	3,76	3,39	3,09	2,78	t				
				6,00	5,88	5,19	4,59	4,09	3,68	3,31	3,01	2,70	t				








起重臂 Jib



地脚反力 Corner Forces

L (mm)	R1 (kN)	R2 (kN)	自重 (t) Dead Weight	配重 (t) Counter Weight
2000	201	267	9.15	无 Without
2500	154	220		

箱单 Packing List

Part	Piece	Description		L (m)	B (m)	H (m)	W(kg*)
UPPORT PART	1	Jib section 01		2.12	1.01	0.68	195
	7	Jib section 02		2.08	0.67	0.85	140
	1	Jib section 03		2.08	0.67	0.78	125
	1	Jib section 04		2.22	0.67	1.40	305
	1	Tower head		4.15	0.99	0.72	730
	1	Tie bar 01 - counter jib		3.20	0.28	0.36	130
	1	Tie bar 02 - counter jib		3.20	0.24	0.19	105
	6	Tie bars - Jib (bundle)		2.14	0.15	0.12	40
	1	Counter jib		2.09	1.29	0.43	415
	1	Hoist unit + rope		1.55	0.84	1.87	1010
	1	Luffing unit + rope		1.28	1.13	1.82	1050
	1	Turntable + slewing unit		1.63	1.65	1.86	1780
	1	Hook Block		0.85	0.10	1.11	160
	1	Dismantling device		0.90	0.77	0.41	65
	4	Angle for turn table		0.74	0.36	0.48	160
	1	Electric control box		1.65	0.40	1.30	500
	1	Resistance box		0.80	0.60	1.12	200

机构性能 Mechanisms

机构特性 Mechanisms specification											kW
起升 Hoisting		30LVF20	m/min	64	48	32	42	32	21	400m	30
			t	1,0	2,0	4,0	2,0	4,0	6,0		
拉臂 Luffing		15DVF16	min	15°~80° t=1,8						170m	15
回转 Slewing		4RVF	r/min	0,70							4,0
电源 Power Supply				380V 50Hz / 440V 60Hz							
KVA 供电容量 Necessary Electric Power				60 kVA							

* 数据可能有所调整，以产品说明书为准。

* Relative parameter might be adjusted. Final parameter is subject to its instruction manual.