



塔头式塔式起重机 Topkit Tower Crane

GHT7032-12

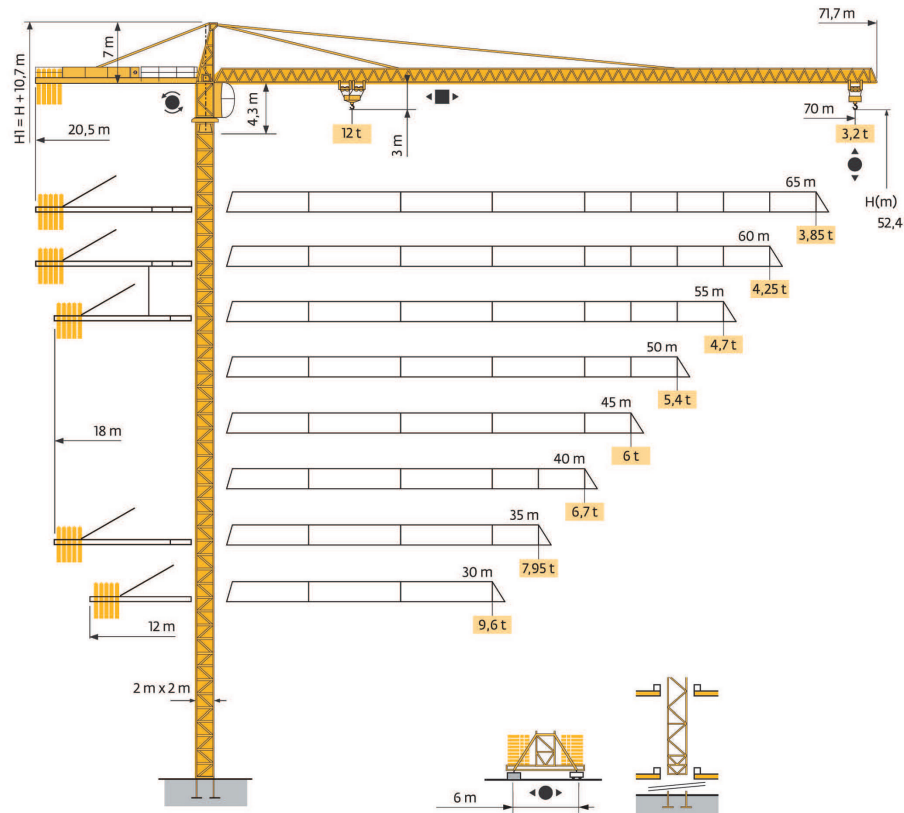


载荷特性 Load Diagrams


| | | | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|----|---|
| 70m | 3,0 | 21,4 | 22 | 25 | 27 | 30 | 32 | 35 | 37 | 37,4 | 41,9 | 45 | 47 | 50 | 52 | 55 | 57 | 60 | 62 | 65 | 67 | 70 | m |
| | | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 5,50 | 5,20 | 4,90 | 4,60 | 4,30 | 4,20 | 3,90 | 3,70 | 3,50 | 3,40 | 3,20 | t | |
| | | 12,00 | 11,60 | 10,00 | 9,10 | 8,00 | 7,30 | 6,50 | 6,10 | 6,00 | 5,50 | 5,20 | 4,90 | 4,60 | 4,30 | 4,20 | 3,90 | 3,70 | 3,50 | 3,40 | 3,20 | t | |
| 65m | 3,0 | 22,8 | 25 | 27 | 30 | 32 | 35 | 37 | 39 | 40,4 | 44,7 | 47 | 50 | 52 | 55 | 57 | 60 | 62 | 65 | m | | | |
| | | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 5,70 | 5,30 | 5,00 | 4,70 | 4,50 | 4,20 | 4,10 | 3,85 | t | | |
| | | 12,00 | 10,80 | 9,80 | 8,70 | 8,00 | 7,20 | 6,70 | 6,30 | 6,00 | 6,00 | 5,70 | 5,30 | 5,00 | 4,70 | 4,50 | 4,20 | 4,10 | 3,85 | t | | | |
| 60m | 3,0 | 22,8 | 25 | 27 | 30 | 32 | 35 | 37 | 39 | 40,4 | 44,7 | 47 | 50 | 52 | 55 | 57 | 60 | m | | | | | |
| | | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 5,70 | 5,30 | 5,00 | 4,70 | 4,50 | 4,25 | t | | | | |
| | | 12,00 | 10,80 | 9,80 | 8,70 | 8,00 | 7,20 | 6,70 | 6,30 | 6,00 | 6,00 | 5,70 | 5,30 | 5,00 | 4,70 | 4,50 | 4,25 | t | | | | | |
| 55m | 3,0 | 22,8 | 25 | 27 | 30 | 32 | 35 | 37 | 39 | 40,4 | 44,7 | 47 | 50 | 52 | 55 | m | | | | | | | |
| | | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 5,70 | 5,30 | 5,00 | 4,70 | t | | | | | | |
| | | 12,00 | 10,80 | 9,80 | 8,70 | 8,00 | 7,20 | 6,70 | 6,30 | 6,00 | 6,00 | 5,70 | 5,30 | 5,00 | 4,70 | t | | | | | | | |
| 50m | 3,0 | 23,3 | 25 | 27 | 30 | 32 | 35 | 37 | 40 | 41,2 | 45,7 | 47 | 50 | m | | | | | | | | | |
| | | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 5,80 | 5,40 | t | | | | | | | | | | |
| | | 12,00 | 11,10 | 10,10 | 8,90 | 8,20 | 7,40 | 6,90 | 6,20 | 6,00 | 5,80 | 5,40 | t | | | | | | | | | | |
| 45m | 3,0 | 23,8 | 25 | 27 | 30 | 32 | 35 | 37 | 40 | 42 | 45 | m | | | | | | | | | | | |
| | | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | t | | | | | | | | | | | |
| | | 12,00 | 11,30 | 10,30 | 9,10 | 8,40 | 7,60 | 7,10 | 6,40 | 6,00 | 6,00 | t | | | | | | | | | | | |
| 40m | 3,0 | 24,7 | 25 | 27 | 30 | 32 | 35 | 37 | 40 | m | | | | | | | | | | | | | |
| | | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | t | | | | | | | | | | | | | |
| | | 12,00 | 11,80 | 10,80 | 9,50 | 8,80 | 7,90 | 7,40 | 6,70 | t | | | | | | | | | | | | | |
| 35m | 3,0 | 24,8 | 25 | 27 | 30 | 32 | 35 | m | | | | | | | | | | | | | | | |
| | | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | 6,00 | t | | | | | | | | | | | | | | | |
| | | 12,00 | 11,90 | 10,80 | 9,60 | 8,90 | 7,95 | t | | | | | | | | | | | | | | | |
| 30m | 3,0 | 24,9 | 25 | 27 | 30 | m | | | | | | | | | | | | | | | | | |
| | | 6,00 | 6,00 | 6,00 | 6,00 | t | | | | | | | | | | | | | | | | | |
| | | 12,00 | 11,90 | 10,90 | 9,60 | t | | | | | | | | | | | | | | | | | |




附着 Anchorages

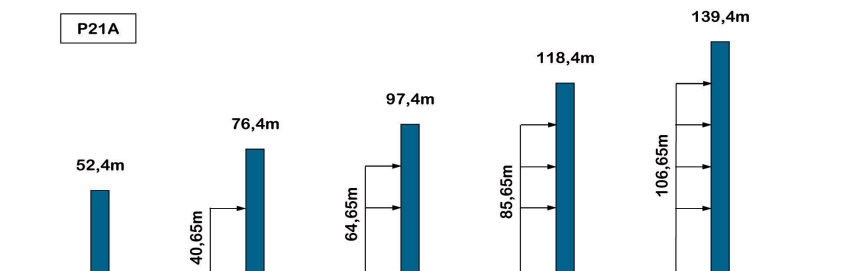

塔身 Tower

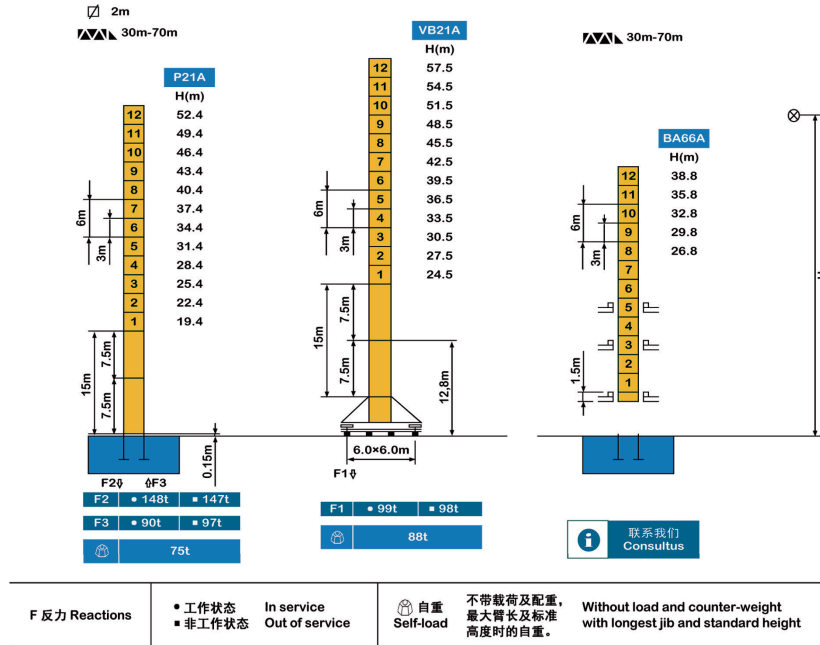

内爬塔机 Climbing Crane

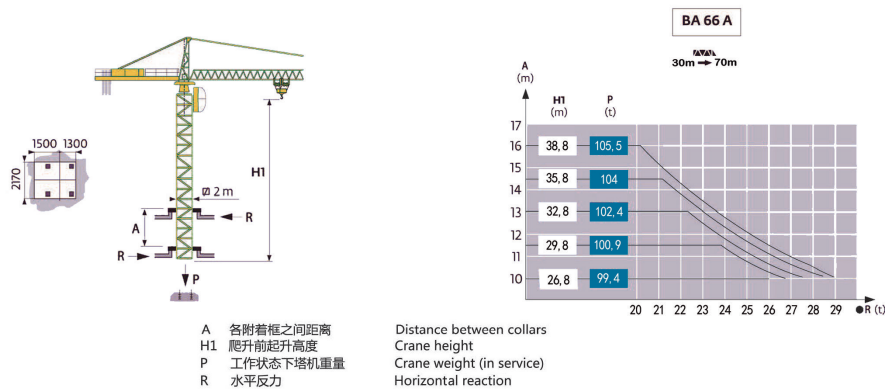

机构性能 Mechanisms

| 机构特性 Mechanisms specification | | | | | | kW | | |
|----------------------------------|--------------------|-------------------------------|-----------|------|------|------|---------|-----|
| 起升 Hoisting | 70RCS30 | m/min | 0-40 | 0-80 | 0-20 | 0-40 | 523m | 51 |
| | | t | 6 | 3 | 12 | 6 | | |
| 变幅 Trolleying | 120JXL | m/min | 0-63 | | | | 570m | 5,5 |
| | | t | 6 | 4,5 | 3 | 1,5 | | |
| 回转 Slewing | RCV145 (JH18T) | r/min | 0-0,7 | | | | 5,5 x 2 | |
| 行走 Travelling | RT544 A12V R ≥ 13m | m/min | 13,5 - 27 | | | | 5,2 x 4 | |
| 电源 Power Supply | | 400V(±10%) 50Hz | | | | | | |
| 供电容量 Necessary Electric Power | | 70RCS: 110kVA / 75LVF: 100kVA | | | | | | |